


## NOVI PROIZVOD

# DX HIGH SPEED DRY


Suha svrdla s 3D-Diamatrix segmentima  
za jednostavno rezanje i brzo bušenje



Adapter s navojem 1,1/4" UNC s velikim ispušnim otvorom

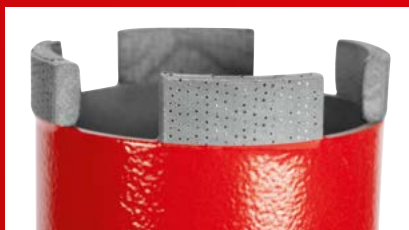

3D-Diamatrix povećava životni vijek i osigurava manje napora

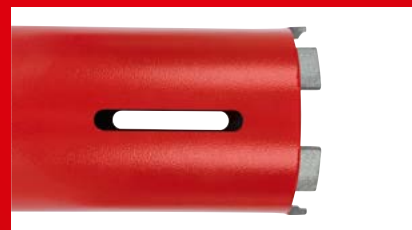

Ventilacijski otvori za uklanjanje prašine od bušenja i za hlađenje



## Tehnički podaci

<b>Dužina</b> 150/330mm	<b>Duljina segmenta</b> 10mm
<b>Promjer</b> 32–205mm	<b>Vrsta segmenta</b> Leća



## DX brzo sušenje

1.1/4" UNC connection	kg	No.
32 mm, Dužina 330 mm	1.07	<b>1500004051</b>
37 mm, Dužina 330 mm	1.17	<b>1500004054</b>
42 mm, Dužina 330 mm	1.27	<b>1500004055</b>
52 mm, Dužina 330 mm	1.47	<b>1500004056</b>
57 mm, Dužina 330 mm	1.58	<b>1500004057</b>
62 mm, Dužina 330 mm	1.68	<b>1500004058</b>
68 mm, Dužina 330 mm	1.81	<b>1500004059</b>
72 mm, Dužina 330 mm	1.91	<b>1500004060</b>
82 mm, Dužina 330 mm	2.13	<b>1500004061</b>
92 mm, Dužina 330 mm	2.36	<b>1500004062</b>
102 mm, Dužina 330 mm	2.61	<b>1500004100</b>
107 mm, Dužina 330 mm	2.73	<b>1500004063</b>
112 mm, Dužina 330 mm	2.86	<b>1500004064</b>
122 mm, Dužina 330 mm	3.12	<b>1500004065</b>
127 mm, Dužina 330 mm	3.94	<b>1500004066</b>
132 mm, Dužina 330 mm	4.11	<b>1500004067</b>
142 mm, Dužina 330 mm	4.46	<b>1500004068</b>
152 mm, Dužina 330 mm	4.81	<b>1500004069</b>
162 mm, Dužina 330 mm	5.18	<b>1500004070</b>
182 mm, Dužina 330 mm	5.93	<b>1500004071</b>
205 mm, Dužina 330 mm	6.85	<b>1500004072</b>

G 1/2" connection	kg	No.
32 mm, Dužina 330 mm	0.76	<b>1500004074</b>
37 mm, Dužina 330 mm	0.83	<b>1500004075</b>
42 mm, Dužina 330 mm	0.9	<b>1500004076</b>
52 mm, Dužina 330 mm	1.04	<b>1500004077</b>
32 mm, Dužina 150 mm	0.59	<b>1500004078</b>
37 mm, Dužina 150 mm	0.62	<b>1500004080</b>
42 mm, Dužina 150 mm	0.66	<b>1500004081</b>
52 mm, Dužina 150 mm	0.75	<b>1500004082</b>
57 mm, Dužina 150 mm	0.79	<b>1500004083</b>
62 mm, Dužina 150 mm	0.83	<b>1500004084</b>
68 mm, Dužina 150 mm	0.88	<b>1500004085</b>
72 mm, Dužina 150 mm	0.93	<b>1500004086</b>
82 mm, Dužina 150 mm	1.03	<b>1500004087</b>
92 mm, Dužina 150 mm	1.13	<b>1500004088</b>
102 mm, Dužina 150 mm	1.24	<b>1500004089</b>
107 mm, Dužina 150 mm	1.3	<b>1500004090</b>
112 mm, Dužina 150 mm	1.36	<b>1500004091</b>
122 mm, Dužina 150 mm	1.49	<b>1500004092</b>
127 mm, Dužina 150 mm	1.84	<b>1500004093</b>
132 mm, Dužina 150 mm	1.93	<b>1500004094</b>
142 mm, Dužina 150 mm	2.09	<b>1500004095</b>
152 mm, Dužina 150 mm	2.27	<b>1500004096</b>
162 mm, Dužina 150 mm	2.45	<b>1500004097</b>
182 mm, Dužina 150 mm	2.83	<b>1500004098</b>
205 mm, Dužina 150 mm	3.27	<b>1500004099</b>

## Pribor

Description	kg	No.
Motor za suho bušenje RODIADRILL 1800 DRY	12.5	<b>FF40185</b>
Bakreni prstenovi 1.1/4"	0.05	<b>FF35190</b>
Rotor za ekstrakciju RODIADUST (svrdlo 1.1/4" UNC / motor G 1/2")	1.9	<b>FF40056</b>
RODIA DW ČISTAČ M	15.0	<b>1000003978</b>

## Nastavci za svrdla

Dužina	kg	G 1/2" No.	kg	1.1/4" UNC No.
100 mm	0.4	<b>FF35040</b>	1.0	<b>FF35060</b>
200 mm	0.9	<b>FF35045</b>	2.0	<b>FF35065</b>
300 mm	1.4	<b>FF35050</b>	3.0	<b>FF35070</b>
500 mm	2.4	<b>FF35055</b>	5.1	<b>FF35075</b>

